

Get out on the water with ease this summer. Our lightweight Air Deck inflatable boats are easy to transport and compact to stow, providing you with the ideal option for your yacht tender requirements or a small boat option for getting out on the water. The Air Deck is constructed using drop-stitch technology which offers rigidity for increased boat performance while keeping weight to a minimum.

BENEFITS

- Thick rubbing strake around the boat to prevent damage
- Made with drop-stiched fabric that gives an extreme rigidity and resistance to perforation
- 2 x stainless steel tow rings fitted around the bow
- 2 x stainless steel eye bolts fitted to transom for davit attachment
- Quick to inflate and deflate
- Solid end cones for protection
- Compact and easy to stow



Affordable, high-quality tenders available in 5 sizes













Drain Plug


WHAT IS INCLUDED

- Foot pump
- Repair kit
- 2x paddles
- Carry valise (bag)
- Mooring line
- Sliding alloy seat

AIR DECK COMPACT INFLATABLE BOAT RANGE



Air deck range comes in 5 size options. Illustration example of sizes.

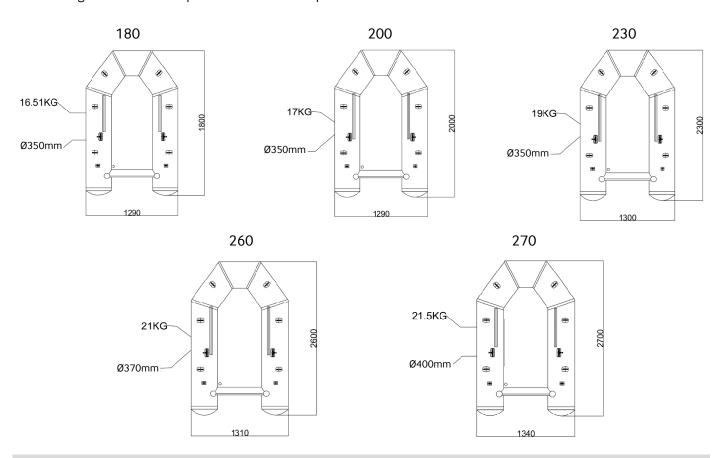

| TECHNICAL DATA | | | | | |
|-----------------------|---|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| Name / Part Code | CREWSAVER AIR DECK 180 / 85050-180 | CREWSAVER AIR DECK 200 / 85050-200 | CREWSAVER AIR DECK 230 / 85050-230 | CREWSAVER AIR DECK 260 / 85050-260 | CREWSAVER AIR DECK 270 / 85050-270 |
| Length mm | 2000 | 2000 | 2300 | 2600 | 2700 |
| Width mm | 1290 | 1290 | 1300 | 1310 | 1350 |
| Tube Diameter mm | 320-350 | 350 | 350 | 370 | 360-400 |
| Number of Persons | 1.5 | 2 | 3 | 3 | 3.5 |
| Max. Loaded Weight kg | 200 | 250 | 350 | 400 | 484 |
| Weight kg | 16.5 | 17 | 19 | 21 | 22 |
| Max Power (HP) | 2.5 | 4 | 5 | 5.26 | 5.9 |
| Max Power (kw) | 1.9 | 3 | 3.75 | 3.9 | 4.3 |
| Packed Dimensions mm | 700 x 400 x 500 | 800 x 400 x 450 | 800 x 400 x 500 | 800 x 400 x 500 | 900 x 400 x 500 |
| Material | 1000 Denier, 0.7mm thickness, 850g/m², 2800/2500 tensile strength, 250/300 tear strength, 105 adhesion strength | | | | |



